



Project: _____
 Location: _____
 Item #: _____
 Quantity: _____

Storage Freezers

FS MODELS —	FS-1D-S7 FS-2D-S7 FS-3D-S7	FSA MODELS —	FSA-1D-S7 FSA-2D-S7 FSA-3D-S7	FA MODELS —	FA-1D-S7 FA-2D-S7 FA-3D-S7
Stainless steel exterior and interior.		Stainless steel exterior. Aluminum interior.		Stainless steel fronts and doors. Aluminum sides and interior.	



FS and FSA Models

- Digital Thermometer/Battery Back-up
- Adjustable Stainless Steel Legs

FA Models

- Dial Thermometer
- Adjustable Legs

Standard Features (all models)

- Energy Saver Switch
- Stainless Steel Case Front and Door(s)
- Heavy-Duty Lifetime Cam Lift Hinges
- Adjustable Wire Shelves
- Lifetime Safety Grip Handle(s)
- Self-Closing Doors with Safety Stops
- Flush Mounted Automatic Interior Lighting
- Energy Saving Thermal Breaker Strips
- Door Opening Accepts 12" x 20" and 18" x 26" Pans
- Heavy-Duty Cylinder Locks
- One Piece Self-Adjusting Magnetic Door Gaskets
- High Impact ABS Interior Door Liner
- Plasticized Fin Coil
- Environmentally Friendly R-404A Refrigerant
- Non-Electric Condensate Evaporator
- Automatic Defrost
- Cord and Plug Attached on 115V Models 12 Amps or Less

Optional Features and Accessories

- Dial or Digital Thermometer
- Two Half Doors in Place of One Full Length Door
- Full and Half Size Hinged Glass Doors with Cylinder Locks
- Change Door Swing
- Adjustable Stainless Steel Wire Shelves
- Stainless Steel Angle Pan Slides
- Zinc Plated Wire Pan Slides
- 5" Diameter Heavy-Duty Swivel Casters with Brakes
- Stainless Steel Case Back
- Fluorescent Lights
- Remote and Pass-Thru Models

Cabinet:

The cabinet front and doors are constructed of heavy gauge polished stainless steel to maintain an attractive appearance for years of heavy use. Foamed-in-place polyurethane insulation throughout the cabinet and doors ensures the ultimate in energy efficiency.

Doors:

The self-closing doors are securely mounted on rugged cam-lift hinges, which have a lifetime guarantee. Each door has a heavy-duty cylinder lock and self-adjusting magnetic gasket to prevent the cold air from escaping. Humidity control wires located around the door jamb prevent condensation from forming on the cabinet front and are concealed by a high impact, non-conductive thermal breaker strip. The interior door liner is constructed of durable ABS material, which resists denting and scratching and is easy to clean. Each safety grip handle is

guaranteed for life. Interior lighting is controlled automatically by a switch mounted in the hinge.

Shelving:

The heavy-duty wire shelves are adjustable in one-inch increments. A wide door opening allows the use of a variety of optional pan slide types for 12" x 20", 18" x 26", and 14" x 18" pans and trays.

Refrigeration System:

All components of the self-contained refrigeration system are mounted on top of the cabinet. The air circulating fans and the forced convection cooling coil are contained in an insulated housing separate from the product zone allowing for maximum food storage capacity. All condensate water is disposed of automatically by the energy efficient non-electric condensate evaporator, no plumbing is required.

Approvals:



Victory Refrigeration specification sheets are available online at www.victory-refrig.com.

CHARACTERISTICS	ONE SECTION		TWO SECTION		THREE SECTION	
	Reach-In	Pass-Thru	Reach-In	Pass-Thru	Reach-In	Pass-Thru
Width, Overall	26 1/2	26 1/2	52 1/8	52 1/8	77 3/4	77 3/4
Depth, Overall (incl. handles)	35 7/8	39 3/8	35 7/8	39 3/8	35 7/8	39 3/8
Height, Overall (incl. adj. legs)	84	84	84	84	84	84
Depth, Door(s) Open 90°	58 1/2	84 5/8	58 1/2	84 5/8	58 1/2	84 5/8
Clear Door Width	21 1/8	21 1/8	21 1/8	21 1/8	21 1/8	21 1/8
Clear Full Door Height	55 1/4	55 1/4	55 1/4	55 1/4	55 1/4	55 1/4
Clear Half Door Height	25 3/8	25 3/8	25 3/8	25 3/8	25 3/8	25 3/8
Capacity Net (cubic feet)	21.5	23.7	46.5	48.0	70.1	75.9
No. of Full Doors	1	2	2	4	3	6
No. of Half Doors	2	4	4	8	6	12
No. of Shelves	3	3	6	6	9	9
Shelf Area (square feet)	17.1	17.1	36.0	36.0	54.2	54.2
Cabinet Voltage	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1
Feed Wires	2	2	2	3	2	2
Condensing Unit Voltage	115/60/1	115/60/1	115/60/1	208-230/60/1		
Condensing Unit Size (HP)	1/2	1/2	1/2	3/4	3/4	1
Total Amperes	8.5	11.0	12.0	15.0	12.9	14.9

Crated dim. & wts.	Ht.	Width	Depth	Cu.Ft.	Lbs
One Section	87	36 1/2	44 3/4	82.2	460
Two Section	87	63 5/8	44 3/4	143.3	600
Three Section	87	90 3/4	44 3/4	204.4	945

Approximate Pass-Thru weights, add 15%


FOR REMOTE MODELS—Substitute an “F” for the “S” in suffix. For example: Model FS-1D S7 (self-contained) would be FS-1D R7 remote cabinet. Air circulating fans, expansion valve and plasticized coil are provided. Condensing units not supplied. The following units are recommended with 1/2” O.D. Suction line, 3/4” O.D. Liquid line.

REMOTE REFRIGERATION

	Cond. Unit	BTUH	Cabinet	Amps*
One Section	1/3 H.P.	1380	115/60/1	5.8
Two Section	1/2 H.P.	2160	115/60/1	7.8
Three Section	3/4 H.P.	3050	115/60/1	8.5

* (In Defrost) For Remote Pass-Thru—Consult factory

Dimensional tolerance ± 1/4” Metric dimensions (MM)

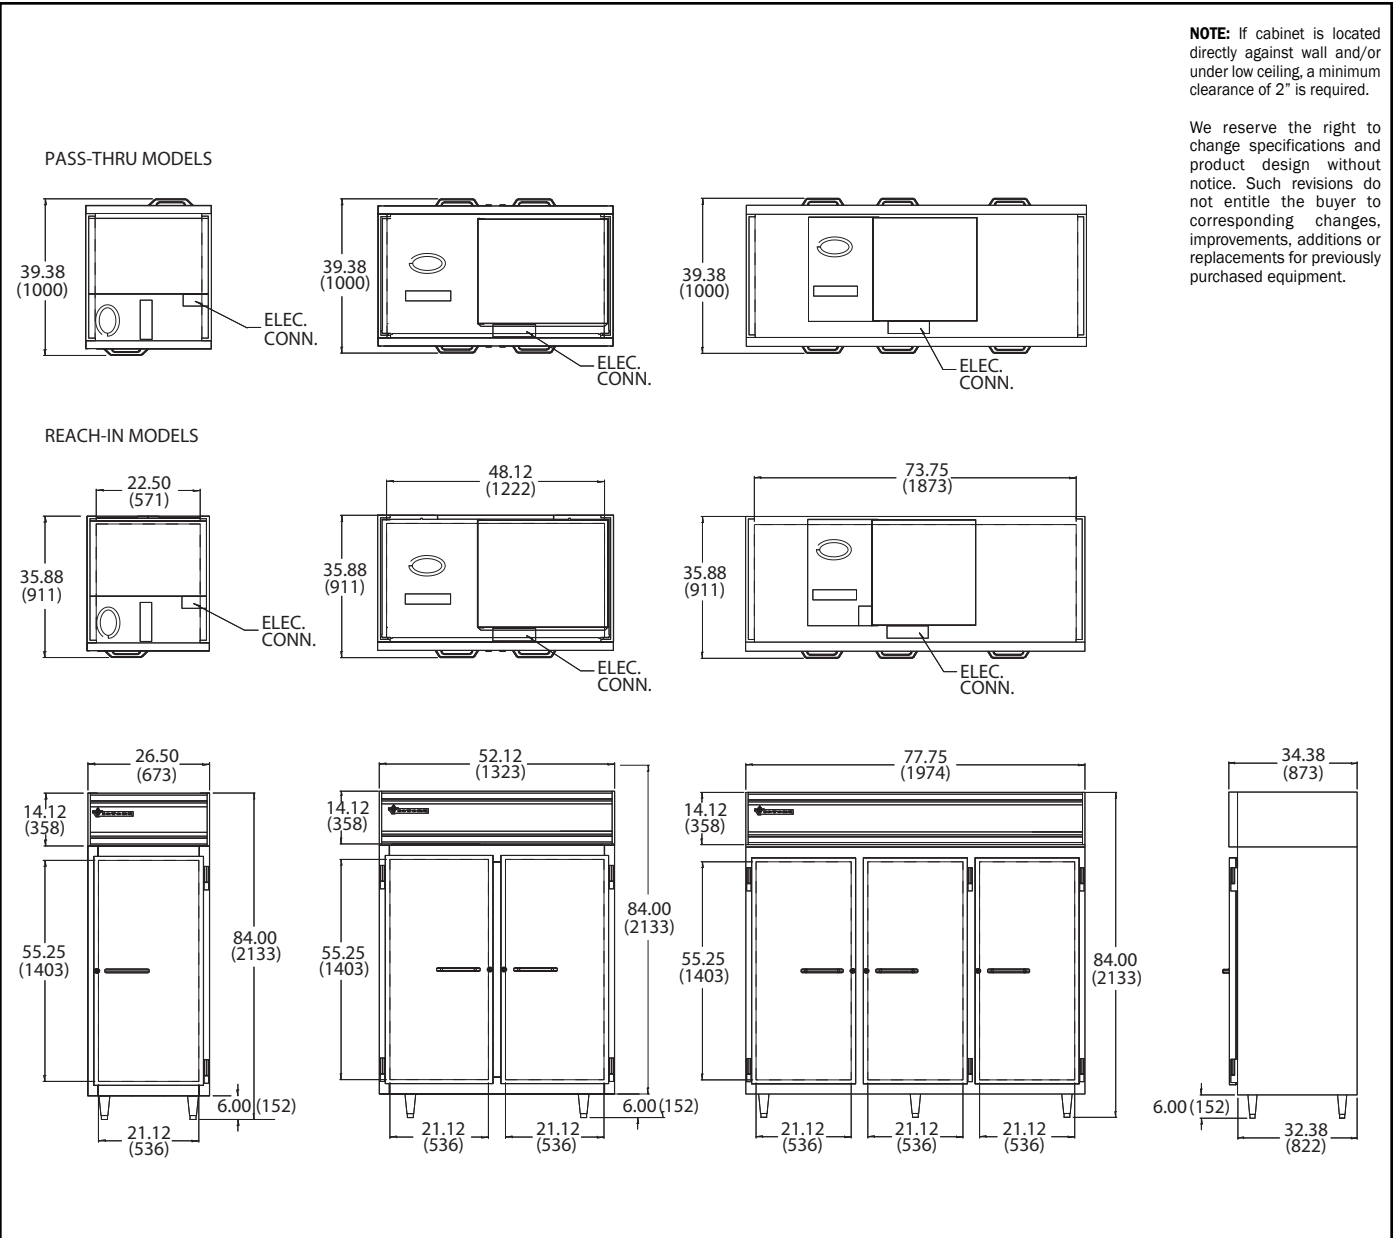

Continuous product development may necessitate specification changes and design without notice.



Victory participates in the KCL CADalog, the most current source of CAD symbols for foodservice designers worldwide. Symbols include standard equipment in plan, side, front and 3-D views, layered for FEDA/FCSI recommended guidelines.